


## Upgrade Kit Instructions

### Prepare the Handles


#### Move the rake head spring clips

1. Remove each plastic rake head by depressing the spring clip tabs and with a twisting motion pull the rake heads off the handles.
2. While depressing both spring clip tabs push the spring clip up into the handle using a screwdriver or pen until the holes in the handle are clear.
3. Repeat for the other handle.

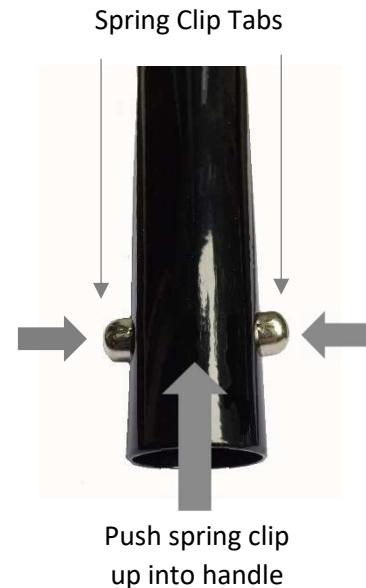

#### Replace the handle hardware (package of parts with washers)

1. Using two 1/2", 13 mm, OR adjustable wrenches, remove the nuts holding the handles together and the 3 washers. Discard these parts.
2. Insert the new bolt through one of the new washers then into the TOP handle hole, through another washer, through the other handle, and the third washer. See image below. NOTE: With the handles oriented as shown in the image, the handle with the grip nearest you should be on TOP.
3. Install the lock nut and tighten so that the handles are secure but move freely - **do not** over-tighten. NOTE: The flat side of the lock nut goes toward the washer.

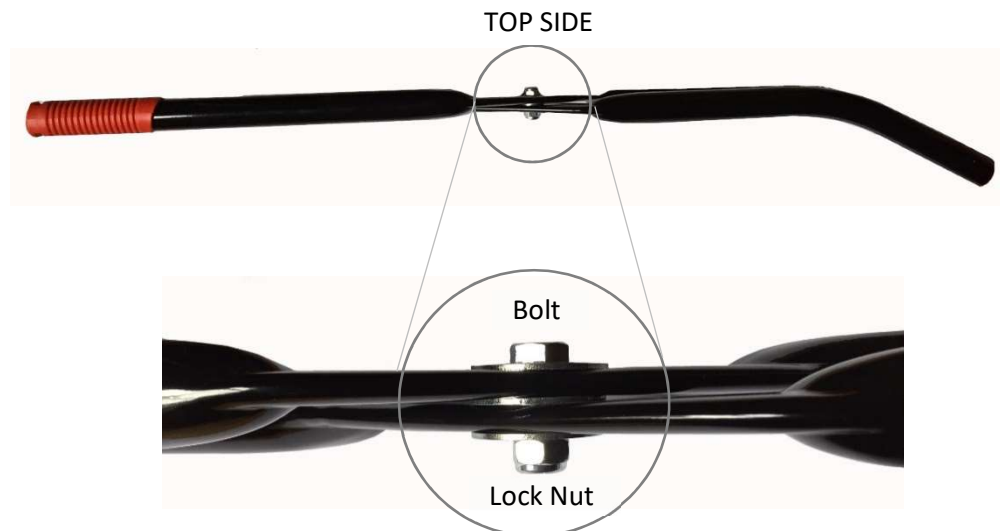

## Upgrade Kit Instructions, continued

### Installing the Steel Heads



Figure 1.

#### Install one head at a time

1. Slide one head onto one of the handle ends with the bend in the middle facing inward – See Figure 1.
2. Align the hole in the handle with the **bottom** hole in the head.
3. Insert a bolt from in between the handles through the head and handle. See Figure 2 below.
4. Hand-tighten the wingnut onto the bolt. **Do not** over-tighten.
5. Repeat Steps 1 – 4 for the other side.

**Questions?** Contact us at [info@gardengrabx.com](mailto:info@gardengrabx.com)

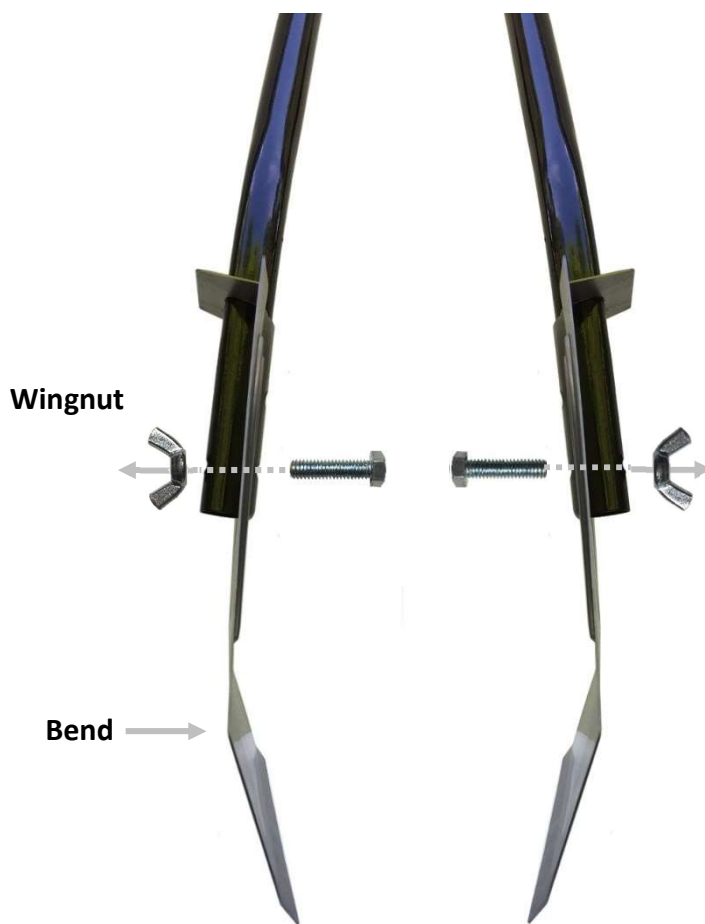


Figure 2.